

10W LED Solar Area Light with Motion Sensor


Product Code	WS-675-10W
Unit Price:	EXW or FOB Shenzhen
LED Light	10W 1050-1200 lumen 6000-6500K
Solar panel	Poly crystalline 12W
Battery (AH/ V)	Lithium ion battery 11.1V 4Ah Life span: 3 years
Work mode:	12 hours per night , Remote control + PIR sensor + Day light sensor Work mode selection + Timer from Remote
Backup	24 hours
Housing Material	ABS plastic
PIR sensor	YES
Operating temp	-20°C to +45°C
Lamp Color temp.	6000-6500K
Install height	3.5-4m
Best Pole height	3.5m
Pole Diam.	70-100mm
Pole distance	10-12m
3D dimensions	515 X 220 X 95 mm
Protection	IP65

10W LED Solar Area Light with Motion Sensor

Product Code	WS-688-10W
Unit Price:	EXW or FOB Shenzhen
LED Light	10W 1050-1200 lumen 6000-6500K
Solar panel	Poly crsytalline 13W
Battery (AH/ V)	LiFePO4 battery 3.2V 18Ah Life span: 2000 cycles (5 - 7 years)
Work mode:	12 hours per night , Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	24 hours
Housing Material	Iron with coating
PIR sensor	YES
Operating temp	-20°C to + 65°C
Lamp Color temp.	6000-6500K
Install height	3.5-4m
Best Pole height	3.5m
Pole Diam.	70-100mm
Pole distance	10-12m
Net dimensions	570 x 270 x 100 cm
Protection	IP65

30W LED Solar Street Light With Motion Sensor

Product Code	WS-603-30W- ROCK
Unit Price:	EXW or FOB Shenzhen
LED Light	30W 100-120 lm/ w 6000-6500 K
Solar panel	Mono crystalline 40W, 17.5V
Battery (AH/ V)	LiFePO4 battery Capacity: 18AH 12.8V Life span: 2000 cycles (5 - 7 years)
Work mode:	12 hours per night , Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	24 hours
Housing Material	Aluminium alloy
PIR sensor	YES
Operating temp	-20°C to +60°C
Lamp Color temp.	6500 K (Cool white)
Install height	4-6 m
Best Pole height	4.5 m
Pole Diam.	70-110mm
Pole distance	> 15 m
Net dimensions	900 x 310 x 55 mm (without bracket)
Protection	IP 65

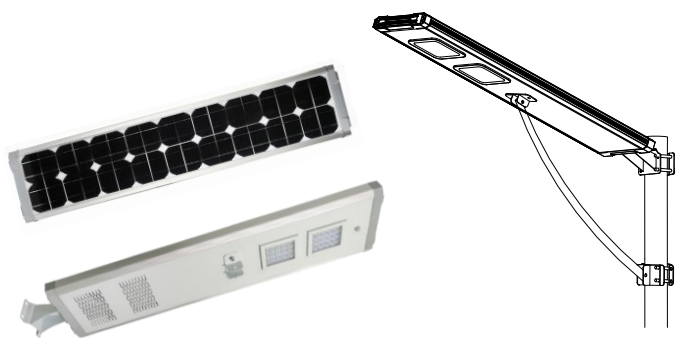40W LED Solar Street Light With Motion Sensor

Product Code	WS-603-40W - ROCK
Unit Price:	EXW or FOB Shenzhen
LED Light	40W 100-120 lm/ w 6000-6500 K
Solar panel	Mono crystalline 60W, 17.5V
Battery (AH/ V)	LiFePO4 battery Capacity: 24AH 12.8V Life span: 2000 cycles (5 - 7 years)
Work mode:	12 hours per night , Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	24 hours
Housing Material	Aluminium alloy
PIR sensor	YES
Operating temp	-20°C to +60°C
Lamp Color temp.	6500 K (Cool white)
Install height	5-7 m
Best Pole height	5.5 m
Pole Diam.	70-110mm
Pole distance	> 25 m between poles
Net dimensions	1260 x 310 x 55mm (without bracket)
Protection	IP 65

30W LED Solar Street Light With Motion Sensor

Product Code	WS-603-30W - SOCKET MOUNT
Unit Price:	EXW or FOB Shenzhen
LED Light	30W 100-120 lm/ w 6000-6500 K
Solar panel	Mono crystalline 40W, 17.5V
Battery (AH/ V)	LiFePO4 battery Capacity: 18AH 12.8V Life span: 2000 cycles (5 - 7 years)
Work mode:	12 hours per night , Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	24 hours
Housing Material	Aluminium alloy
PIR sensor	YES
Operating temp	-20°C to +60°C
Lamp Color temp.	6500 K (Cool white)
Install height	4-6 m
Best Pole height	4.5 m
Pole Diam.	70mm on top.
Pole distance	> 15 m between poles
Net dimensions	900 x 310 x 55mm (without bracket)
Protection	IP 65

40W Solar Street Light With Motion Sensor

Product Code	WS-603-40W - SOCKET
Unit Price:	EXW or FOB Shenzhen
LED Light	40W 100-120 lm/ w 6500 K updating
Solar panel	Mono crystalline 60W, 17.5V
Battery (AH/ V)	LiFePO4 battery Capacity: 24AH 12.8V Life span: 2000 cycles (5 - 7 years)
Work mode:	12 hours per night , Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	24 hours
Housing Material	Aluminium alloy
PIR sensor	YES
Operating temp	-20°C to +60°C
Lamp Color temp.	6500 K (Cool white)
Install height	5-7 m
Best Pole height	5.5 m
Pole Diam.	70mm on top.
Pole distance	> 25 m between poles
Net dimensions	1260 x 310 x 55mm (without bracket)
Protection	IP 65

60W LED Solar Street Light With Motion Sensor



Product Code	WS-603-60W - SOCKET
Unit Price:	EXW or FOB Shenzhen
LED Light	45W 100-120 lm/ w 6500 K updating
Solar panel	Mono crystalline 80W, 17.5V
Battery (AH/ V)	LiFePO4 battery Capacity: 30AH 12.8V Life span: 2000 cycles (5 - 7 years)
Work mode:	12 hours per night , Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	24 hours
Housing Material	Aluminium alloy
PIR sensor	YES
Operating temp	-20°C to +60°C
Lamp Color temp.	6500 K (Cool white)
Install height	5-7 m
Best Pole height	5.5 m
Pole Diam.	70mm on top.
Pole distance	> 25 m between poles
Net dimensions	1650 x 310 x 55mm
Protection	IP 65

10W LED Solar Motion Flood Light



Product Code	WS-650-10W
Unit Price:	EXW or FOB Shenzhen
LED Light	10W 24PCS LED 1200-1300 lm 90°per 120°
Solar panel	Poly crystalline 12W 6V
Battery (AH/ V)	LiFePO4 battery 3.2V 12Ah life span 2000 cycles 5-7 years
Work mode:	Remote control Timer: 6 hours 8 hours 12 hours of lighting 3 models: Energy saving/motion light/ dim light
Backup	24 hours
Housing Material	Die cast aluminum + Aluminum alloy
Sensor	Microwave sensor
Operating temp	-20°C to + 65°C
Lamp Color temp.	6000-6500K
Install height	3.5-4m
Best Pole height	3.5m
Pole Diam.	Nper M
Pole distance	Nper M
3D dimensions	199.6 (241.9) x 169 x 51.8 mm (Lighting)
Protection	IP65

15W LED Solar Motion Flood Light



Product Code	WS-650-15W
Unit Price:	EXW or FOB Shenzhen
LED Light	15W 36PCS LED 1800-1950 lm 90°per 120°
Solar panel	Poly crystalline 20W 6V
Battery (AH/ V)	LiFePO4 battery 3.2V 18Ah life span 2000 cycles 5-7 years
Work mode:	Remote control Timer: 6 hours 8 hours 12 hours of lighting 3 models: Energy saving/motion light/ dim light
Backup	24 hours
Housing Material	Die cast aluminum + Aluminum alloy
Sensor	Microwave sensor
Operating temp	-20°C to + 65°C
Lamp Color temp.	6000-6500K
Install height	3.5-4m
Best Pole height	3.5m
Pole Diam.	Nper M
Pole distance	Nper M
Net dimensions	229.6 (282.3) x 220 x 51.8 mm
Protection	IP65

20W LED Solar Motion Flood Light



Product Code	WS-650-20W
Unit Price:	50.5 \$ EXW or FOB Shenzhen
LED Light	20W 60PCS LED 2400-2600 lm 90°per 120°
Solar panel	Poly crystalline 25W 6V
Battery (AH/ V)	LiFePO4 battery 3.2V 24Ah life span 2000 cycles 5-7 years
Work mode:	Remote control Timer: 6 hours 8 hours 12 hours of lighting 3 models: Energy saving/motion light/ dim light
Backup	24 hours
Housing Material	Die cast aluminum + Aluminum alloy
PIR sensor	Microwave sensor
Operating temp	-20°C to + 65°C
Lamp Color temp.	6000-6500K
Install height	3.5-4m
Best Pole height	3.5m
Pole Diam.	Nper M
Pole distance	Nper M
Net dimensions	299.6 (337.3) x 269 x 51.8 mm
Protection	IP65

40W LED Solar Street Light - All-in-Two



Product Code	WS-640-40W
Unit Price:	EXW or FOB Shenzhen
LED Light	40W 5200 lumen 3000-6500K LED Chip
Solar panel	Poly crystalline Solar Panel 100W 18V
Battery (AH/ V)	537.6Wh LiFePO4 battery 12.8V 42Ah life span 2000 cycles 5-7 years
Work mode:	12 hours per night , 4 hours of 40W LED - high light 8 hours of 15-20W LED - low light
Backup	24 hours
Housing Material	Die cast aluminum + Aluminum alloy
PIR sensor	NO
Operating temp	-20°C to + 65°C
Lamp Color temp.	3000-6500K
Install height	4.5-7 m
Best Pole height	6m
Pole Diam.	70-76mm
Pole distance	25m
Net dimensions	650*355*270mm (lighting fixture)
Protection	IP65

16W LED Solar Street Light - All-in-Two



Product Code	WS-629-16W
Unit Price:	EXW or FOB Shenzhen
LED Light	16W 1920 lm 6000-6500K
Solar panel	Poly crystalline 40W
Battery (AH/ V)	LiFePO4 battery 172.8WH 3.2V 54AH life span 2000 cycles 5-7 years
Work mode:	12 hours per night , 4 hours of 16W LED - high light 8 hours of 3-5WLED - low light
Backup	24 hours
Housing Material	Die cast aluminum + Aluminum alloy
PIR sensor	NO
Operating temp	-20°C to + 65°C
Lamp Color temp.	6000-6500K
Install height	3.5-4.5m
Best Pole height	4m
Pole Diam.	70-76mm
Pole distance	15-20m
Net dimensions	Nper M
Protection	IP65

40W LED Solar Street Light - All-in-One



Product Code	WS-629-40W
Unit Price:	EXW or FOB Shenzhen
LED Light	40W LED 5200 lm 6000-6500K
Solar panel	Poly crystalline 100W
Battery (AH/ V)	LiFePO4 battery 384Wh 3.2V 120Ah life span 2000 cycles 5-7 years
Work mode:	12 hours per night , 4 hours of 40W LED - high light 8 hours of 5-8W LED - low light
Backup	24 hours
Housing Material	Die cast aluminum + Aluminum alloy
PIR sensor	NO
Operating temp	-20°C to + 65°C
Lamp Color temp.	6000-6500K
Install height	3.5-4.5m
Best Pole height	4m
Pole Diam.	70-76mm
Pole distance	15-20m
Net dimensions	Nper M
Protection	IP65

5W LED Solar Garden Light With Motion Sensor



Product Code	WS-610-5W
Unit Price:	EXW or FOB Shenzhen
LED Light	5W LED 500 lm 6000-6500K
Solar panel	Poly crsytalline 5W
Battery (AHper V)	6.4V 3Ah LiFePO4 battery life span 2000 cycles 5-7 years
Work mode:	8 hours per night Dim mode 30% brightness Bright mode 100% when motion sensed
Backup	2 nights
Housing Material	ABS plastic
PIR sensor	YES
Operating temp	-20°C to + 45°C
Lamp Color temp.	6000-6500K
Install height	3-4m
Best Pole height	3.5m
Pole Diam.	20-60mm
Pole distance	10-12m
Net dimensions	367 X 205 X 55 mm
Protection	IP65



UP TO
12 HRS
PER NIGHT



SOLAR
MODEL • MODELO • MODÈLE


No.: WS-675

10W
SOLAR
GARDEN
LIGHT
with motion sensor



DARK GREY RESIN FINISH

DIY ✗ NO WIRING

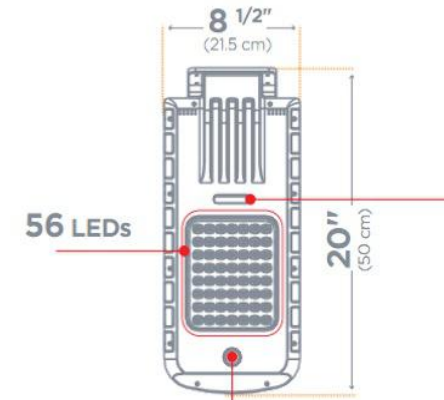

MOTION SENSOR
(140° DETECTION ZONE UP TO 40' AWAY)
Sensor de Movimiento de 140°
(Detección de ≈ 6 - 12 metros)
Capteur de Mouvement à 140°
(Détection de ≈ 6 - 12 mètres)

